

Technical Data Sheet

Dependable, Reliable and Unwavering

Tetrosyls Carlube 15W-40 is a trustworthy, reliable and unwavering engine oil which provides strong corrosion and wear protection to key components in an engine, maintaining a clean and highly performing motor for trouble-free driving.

Performance Benefits

Carlube 15W-40 has been thoroughly tested against American and European industry wide specifications and criteria to provide reassuring and reliable engine protection and performance whilst used within the recommended oil drain intervals.

With especially strong wear protection as proven in cylinder wear tests, Carlube 15W-40 provides peace of mind for trouble free motoring, with 66% less cylinder wear than the industry OM646LA test requires.


Carlube 15W-40 is ideal for fleet owners where mixed vehicle types and brands are in use, due to the convenience of approvals including ACEA A3/B4, API CI-4 and API SL, all of which feature heavily in OEM requirements as per vehicle handbook recommendations.

Tested at temperatures as low as -42° , Carlube 15W-40 performs when engines are coldest, in cool climates when engines are at the most risk, remaining viscous and fluid, able to flow to the most vulnerable areas of an engine during the cold winter months in Northern Europe and beyond.

Carlube 15W-40 protects engines from wear and corrosion all year round.




Average CAM Wear

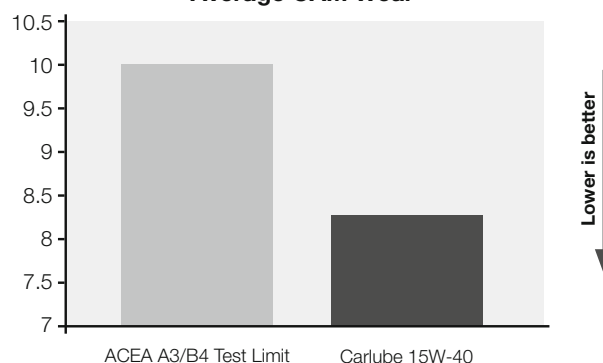

17% Below the Test Limit Requirements

Engine Sludge

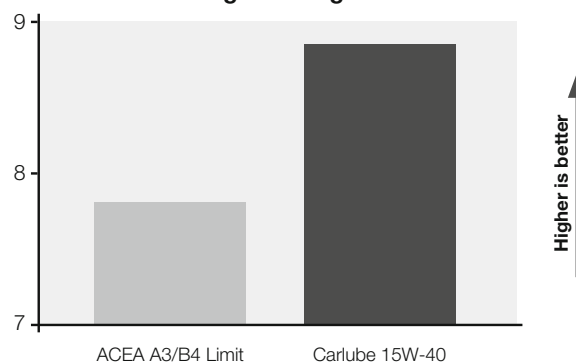

13% Improvement Over Test Limit



Solid and Dependable Engine Oil

Issuing Body	Performance Specification
ACEA	A3/B4-12
API	CI-4, SL

Product Reference

Size	Part No	Barcode
1 Litre	XPP010	
4.55 Litre	XPP455	
20 Litre	YFA020	
199 Litre	YFA199	

Properties

Property	Result
SAE Viscosity Grade	15W-40
Kinematic Viscosity (mm ² /s)	@40°C
	@100°C
Viscosity Index (VI)	145
Pour Point (°C)	-42
Flash Point (°C)	235
Sulphated Ash (%)	1.49



Environmental Protection & Safety Precautions

Do not pour used surplus oil down sewers or drains. Dispose of used or surplus oil at your nearest oil-recycling bank. Dispose of empty packs in a responsible manner. Store container in an upright position and secure when transported. Wear goggles if splashing risk. Avoid exposure to oil mist. When using oil do not eat, drink or smoke. Wash hands after use.

Disclaimer

This Product Information Sheet does not constitute to any extent a fitness for purpose warranty or a quality specification. It is intended to be indicative only of the general characteristics of the product(s) and may not be relied upon (in whole or in part) in substitution of nor as a supplement to any of the information and/or instructions and/or warnings set out on the product(s) and/or on any packaging and/or in the relevant Safety Data Sheet (which is available on request).

Users of a product marked "For Professional Use Only" are deemed to declare and acknowledge for themselves professional levels of skill, knowledge, competence and experience in the selection and use of such product(s).

Product Information Sheets are updated from time to time and inquiries should be made on a regular basis to ensure that this is the latest version available.